



SINZ OCTOPUS

Wet and dry suction unit for semi mobile or stationary use.
 Suitable for industrial downtime applications or central vacuuming systems.




CONTROL PANEL
with telematic



SUCTION POWER
6500 m³ / h



TANK CAPACITY
up to 3 m³

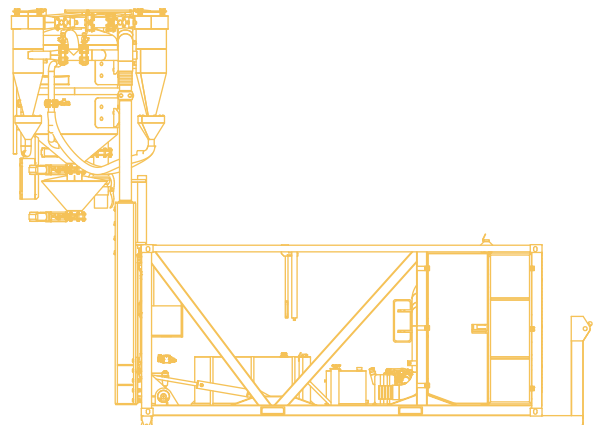

CONTACT

E-mail: sales@sinz.de
 Phone: +420 721 517 421

Basic parameters

- Suction output up to 6500 m³/h, achievable vacuum over 90%.
- Large tank stroke, drain valve at a height of 3 m.
- Possibility of discharge into big-bags or containers.
- Main tank capacity up to 3m³.
- Advanced cyclone air filtration system with high efficiency.
- Easy filter replacement.
- Automated filter cleaning.
- The mobile version is equipped with hydraulic tilting and lifting of the main tank.
- Intuitive control panel with color display, graphical interface and backlit buttons.
- Warning beacon and acoustic warning signal.
- Configuration of the filtration system according to the required suction output.
- Measurement of filter clogging level with visualization on the display.

Optional items

- Available in diesel and electric variants.
- Continuous unloading system without interruption of suction.
- 20" shipping container or ABROL container variants for easy transport.
- Available in stationary version suitable for central vacuum systems.
- Available with radio remote control.



Large tank stroke, drain valve at a height of 3 m.



Intuitive SINZ Control panel.



ABROL container option.

